



Wireless Asset Sensor

General Description

The Wireless Asset Sensor can be attached to an asset and alert you if the asset is removed from range of the wireless sensor gateway.

- Alerts stakeholders if assets leave premises.



Free software basic online wireless sensor monitoring and notification system to configure sensors, view data and set alerts via SMS text and email.

Principle of Operation

The Efficient Power Tech Wireless Asset Sensor outputs an RF signal at set intervals to be received by the gateway and monitoring system. The sensor can be used determine if an asset is removed from the premises and send notifications via SMS text or email from the system to alert the user.

Example Applications

- Asset monitoring
- Tell if school buses are on premises
- Tell if fleet vehicles are on premises
- Monitor rental tools
- Construction asset monitoring


And many more...

Efficient Power Tech Sensor Core Specifications

- Wireless Range: 250 - 300 ft. (non-line-of-sight / indoors / through walls, ceilings & floors) *
- RF Communication: 900, 920, 868 and 433 MHz
- Power: Replaceable batteries (optimized for long battery life) - Line-power (AA version) and solar (Industrial version) options available
- Battery Life (at 1 hour heartbeat setting): **
 - AA battery > 4-8 years
 - Coin Cell > 2-3 years.
 - Industrial > 4-8 years
 - Wifi > Up to 5 years

* Actual range may vary depending on environment. (Wi-Fi sensor typical range up to 100 ft.)

** Battery life is determined by sensor reporting frequency and other variables.

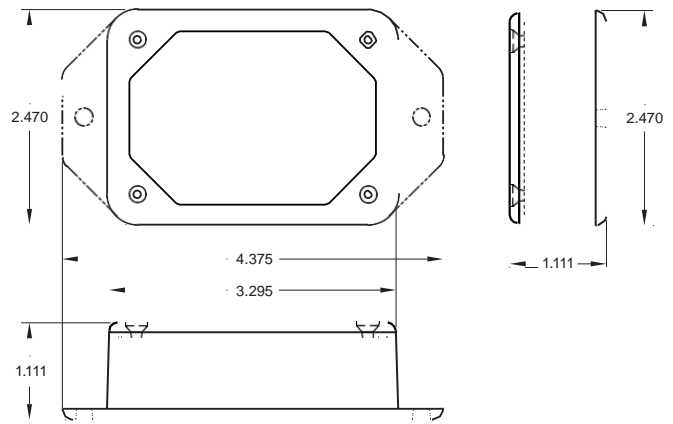

Wireless Asset Sensor (Coin Cell) - Technical Specifications

| | |
|---|--|
| Supply Voltage | 2.0 - 3.6 VDC * |
| Current Consumption | 0.7 μ A (sleep mode) 2 mA (radio idle/off mode) 2 mA (measurement mode) 25 mA (radio RX mode) 35 mA (radio TX mode) |
| Operating Temperature Range (Board Circuitry and Coin Cell) | -7°C to +60°C (20°F to +140°F) ** |
| Optimal Battery Temperature Range (Coin Cell) | +10°C to +50°C (+50°F to +122°F) |
| Weight | 0.7 oz. |
| Wireless Range | 250 - 300 ft. (Indoors / Through walls, ceilings & floors) Range may vary according to environmental variables. |
| Certifications Industry Canada | 900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 920 MHz product; ARIB STD-T108 R210-103733. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05). |

* Hardware cannot withstand negative voltage. Please take care when connecting a power device.


** At temperatures above 100°C, it is possible for the board circuitry to lose programmed memory.


Power Options

Sensors are powered by a replaceable 3.0 V coin cell battery. Optional AA battery powered sensors are available. The AA version of these sensors are larger in size (3" [L] x 2.1" [W] x 1.2" [H]) and include two long-life AA batteries.

It is recommended that unless you are using the AA battery solution, you set heartbeat to no faster than one hour to preserve battery life.

PinchPower™ Enclosure

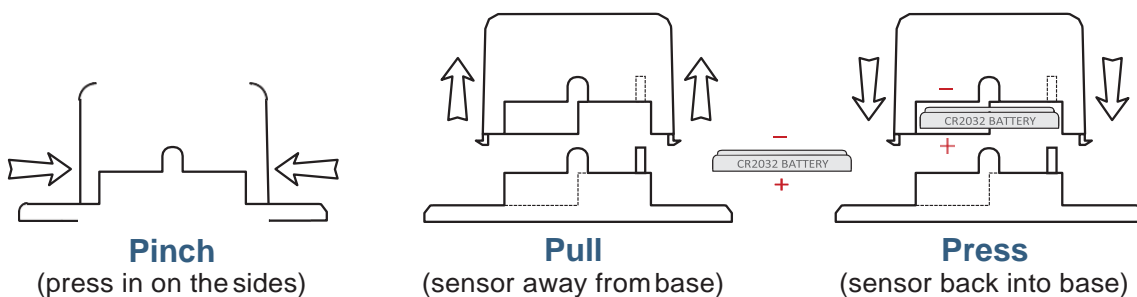

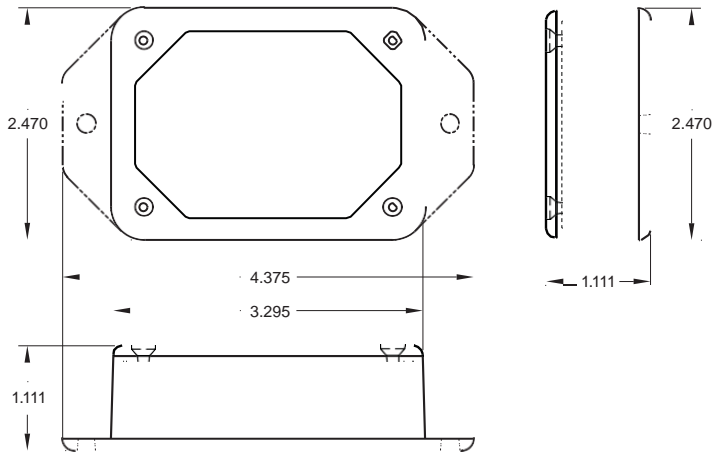

Wireless Asset Sensor (AA) - Technical Specifications

| | |
|---|--|
| Supply Voltage | 2.0 - 3.6 VDC (3.0 - 3.6 VDC Using Power Supply) * |
| Current Consumption | 0.7 μ A (sleep mode) 2 mA (radio idle/off mode) 2 mA (measurement mode) 25 mA (radio RX mode) 35 mA (radio TX mode) |
| Operating Temperature Range (Board Circuitry and Batteries) | -18°C to 55°C (0°F to 130°F) using alkaline -40°C to 85°C (-40°F to 185°F) using lithium ** |
| Optimal Battery Temperature Range (AA) | +10°C to +50°C (+50°F to +122°F) |
| Weight | 3.6 oz. |
| Wireless Range | 250 - 300 ft. (Indoors / Through walls, ceilings & floors) Range may vary according to environmental variables |
| Certifications Industry Canada | 900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 920 MHz product; ARIB STD-T108 R210-103733. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05). |


* Hardware cannot withstand negative voltage. Please take care when connecting a power device.

** At temperatures above 100°C, it is possible for the board circuitry to lose programmed memory.






Power Options

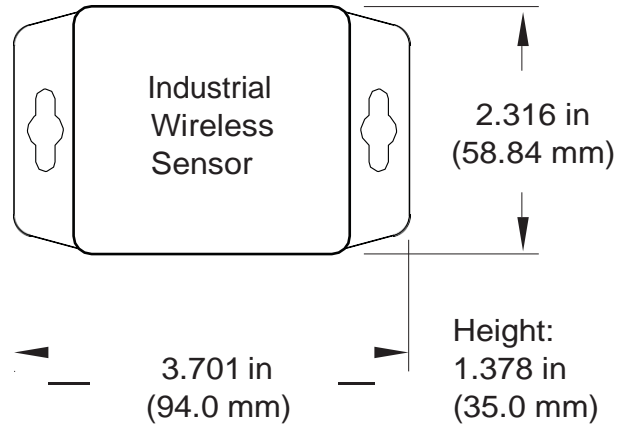Two replaceable 1.5V AA sized batteries are included with the standard model. A line-power version with battery backup is also available - allowing it to be powered by a standard 3.0 - 3.6V power supply and use the internal batteries if there is a power interruption.

Power options must be selected at time of purchase as the internal hardware of the sensor must be changed to support the selected power requirements.



Wireless Asset Sensor (Industrial) - Technical Specifications

| | | |
|---|--|--|
| Supply Voltage | 2.0 - 3.6 VDC * | |
| Current Consumption | 0.7 μ A (sleep mode) 2 mA (radio idle/off mode) 2 mA (measurement mode) 25 mA (radio RX mode) 35 mA (radio TX mode) | |
| Operating Temperature Range (Board Circuitry and Battery) | | |
| Included Battery | Max Temperature Range: | -40°C to +85°C (-40°F to +185°F) ** |
| | Capacity: | 1800 mAh |
| Optional Solar Feature | Solar Panel: | 5VDC / 30mA (53mm x 30mm) |
| | Charging Temperature Range: | 0°C to 45°C (32°F to 113°F) |
| | Max Temperature Range: | -20°C to 60°C (-4°F to 140°F) |
| | Included Rechargeable Battery: | 600 mAh / >2000 Charge Cycles (80% of initial capacity) |
| Enclosure Rating | NEMA 1, 2, 4, 4x, 12 and 13 rated, sealed & weather proof | |
| UL Rating | UL Listed to UL508-4x specifications (File E194432) | |
| Weight | 4.7 oz. (solar option 5.1 oz.) | |
| Wireless Range | 250 - 300 ft. (Indoors / Through walls, ceilings & floors) Range may vary according to environmental variables. | |
| Certifications | <div style="display: flex; align-items: center; gap: 10px;">      </div> 900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 920 MHz product; ARIB STD-T108 R210-103733. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05). | |


* Hardware cannot withstand negative voltage. Please take care when connecting a power device.

** At temperatures above 100°C, it is possible for the board circuitry to lose programmed memory.




Solar Power Option

Efficient Power Tech Industrial Sensors are powered by a replaceable 3.6V Lithium battery (included). An optional solar powered version is also available. The solar powered sensor uses a Lithium Iron Phosphate rechargeable battery in conjunction with a solar power cell to extend battery life.

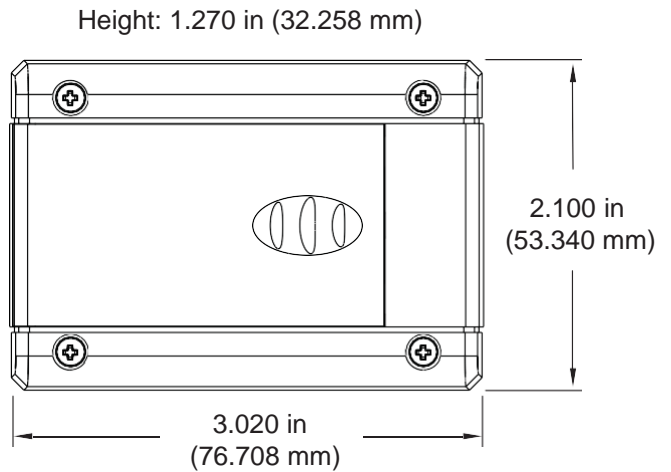

Wireless Asset Sensor (MOWI Wi-Fi) - Technical Specifications

| | |
|-----------------------------------|---|
| Networking Standards | IEEE 802.11 b/g |
| Frequency Band | 2.412 - 2.484 GHz |
| Wi-Fi Security Standards | Open, WEP, WPA, WPA2 |
| Wi-Fi Security Programming | Via PC software using USB cable. (Can be changed through software online software.) |
| Network Settings | Auto DHCP/DNS or Static |
| Data Logging | Standard - On Wi-Fi disruption, unit will log the first 50 readings and transmit when Wi-Fi connection is re-established. Premiere - Unit can record up to 50,000 readings and transmit when Wi-Fi is available. |
| Power consumption | 4uA sleep, 35mA active RX, 180mA TX (at +12dBm) |
| Battery Life | Up to 5 years depending on sensor type, Wi-Fi security, distance from Wi-Fi router, reporting frequency and other variables. (Testing surpassed 90,000 transmissions until battery depletion.) |
| Wi-Fi Data Rate | Auto configures to best rate for maximum range. |
| Electronics Operating Temperature | Using Alkaline Batteries: -18°C to +55°C (0°F to +130°F) Using Lithium Batteries: -40°C to +85°C (-40°F to +185°F) * |
| LED Light | Status / Activity |
| Weight | 4.7 oz. (solar option 5.1 oz.) |
| Wireless Range | Up to 100 ft. device range (typical to standard Wi-Fi devices) Range may vary according to environmental variables. |
| Certifications |  FCC ID: T9J-RN171. IC: RSS-210 low-power communication device. CE ID: 0681. |

* At temperatures above 100°C, it is possible for the board circuitry to lose programmed memory.



High Gain Antenna Option

Efficient Power Tech Wi-Fi sensors are also available with a detachable high gain antenna to provide a 20-30% increase in range over the standard Wi-Fi sensor. Option uses a different hardware configuration and must be chosen at time of purchase.

Notes:

Commercial Grade Sensors

Efficient Power Tech commercial grade sensors are designed for applications in ordinary environments (normal room temperature, humidity and atmospheric pressure). Do not use these sensors under the following conditions as these factors can deteriorate the product characteristics and cause failures and burn-out.

- Corrosive gas or deoxidizing gas - chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas, nitric oxides gas, etc.)
- Volatile or flammable gas
- Dusty conditions
- Under low or high pressure
- Wet or excessively humid locations
- Places with salt water, oils chemical liquids or organic solvents
- Where there are excessively strong vibrations
- Other places where similar hazardous conditions exist

Use these products within the specified temperature range. Higher temperature may cause deterioration of the characteristics or the material quality.

Industrial Grade Sensors - Type 1, 2, 4, 4X, 12 and 13 NEMA Rated Enclosure

Efficient Power Tech's Industrial sensors are enclosed in reliable, weatherproof NEMA rated enclosures. Our NEMA rated enclosures are constructed for both indoor or outdoor use and protect the sensor circuitry against the ingress of solid foreign objects like dust as well as the damaging effects of water (rain, sleet, snow, splashing water, and hose directed water).

- Safe from falling dirt
- Protects against wind-blown dust
- Protects against rain, sleet, snow, splashing water, and hose directed water
- Increased level of corrosion resistance
- Will remain undamaged by ice formation on the enclosure

For more information about our products or to place an order, please contact our sales department at 713-783-2367.

Visit us on the web at www.Efficient Power Tech.com.



Efficient Power Tech Corporation
1800 Augusta Dr. #232
Houston, TX, 77057
713-783-2367
www.Efficient Power Tech.com